SUPER BASS EXTREME





FEATURES Super Bass Extreme

Optimized for corner mounting, Super Bass Extreme's elegant wooden front is based on Vicoustic's flagship Wave Wood panel. This is combined with a membrane, two high-density foam layers and a micro-perforated rear panel, with 1mm holes, that acts as a Helmholtz resonator. Designed to provide effective low frequency absorption between 60-125 Hz, it delivers maximum effectiveness between 75 -100Hz. The wooden front panel has two functions, providing sufficient mid-high frequency absorption to control corner reflections without deadening the sound, while simultaneously acting as a diffuser.

When porous materials such as foam are applied to corners or walls, they become less efficient in dealing with low frequencies, because the particle velocity or air movement associated with long wavelengths is low. However, the sound pressure is at its maximum. Super Bass Extreme's internal membrane transforms this high pressure by converting the pressure fluctuations into air motion. The membrane sympathetically vibrates over a frequency range of 75-90 Hz, causing the air to pass through a layer of high-density foam that absorbs the low frequencies. Because of the high pressure it has also been possible to introduce a further technique for aiding absorption, with the micro-perforated panel at the back of the unit acting as a tuned Helmholtz resonator. Tests actually showed the perforations to give 20% more efficiency, compared to using a non-perforated panel.


Super Bass Extreme is highly recommended for smaller rooms with low frequency issues. The panel can be used in different corner positions and its modular structure allows further units to be added as required. With an eye to interior design compatibility, Super Bass Extreme is available in five elegant wood finishes that match Vicoustic's range of Wave Wood panels.

APPLICATIONS Super Bass Extreme

Listening Rooms, Home Theaters, Recording and Broadcast Studios, Post Production Studios, Performance Spaces, Rehearsal Rooms, Conference and Teleconference Rooms, Public Spaces, Auditoriums, etc.

TECHNICAL INFORMATION Super Bass Extreme

Material: Wood Membrane; High density acoustic foam; Perforated Wood. Installation: Adhesive Flexi Glue

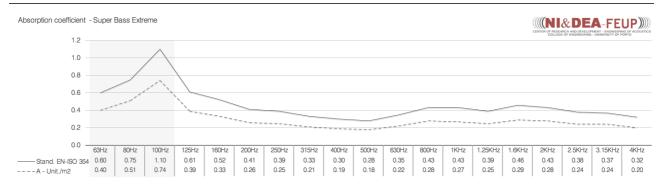

PERFORMANCE Super Bass Extreme

VICOUSTIC – Visound Acústica Lda – R. Quinta do Bom Retiro Nº 16 Armazém 9 – 2820-690 Charneca da Caparica – Portugal VAT PT505700034 Tel +351 212964100 Fax +351 212 964 101 – Email info@vicoustic.com - Web www.vicoustic.com